

NEW STYLE


50 x 50 CM - 25 x 100 CM



NEW STYLE 65-201



NEW STYLE 65-101

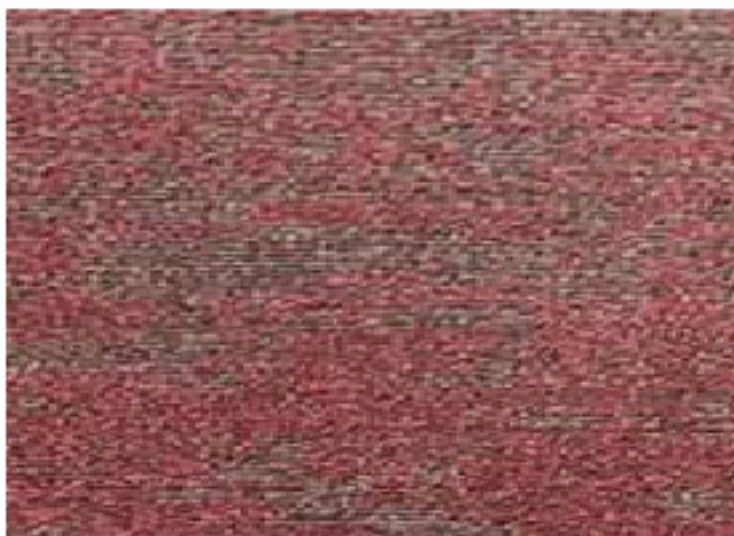


NEW STYLE 65-102




NEW STYLE 65-103

NEW STYLE

50 x 50 CM - 25 x 100 CM

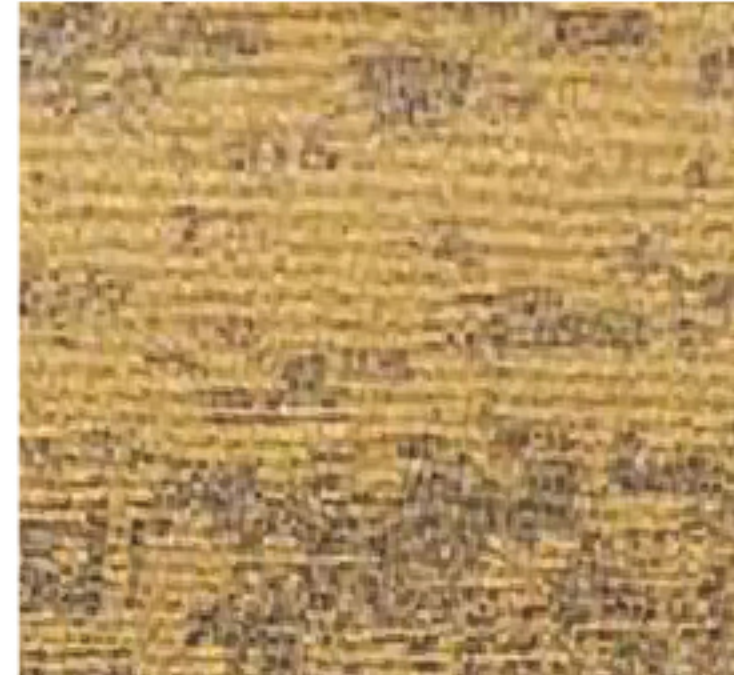

NEW STYLE 65-105

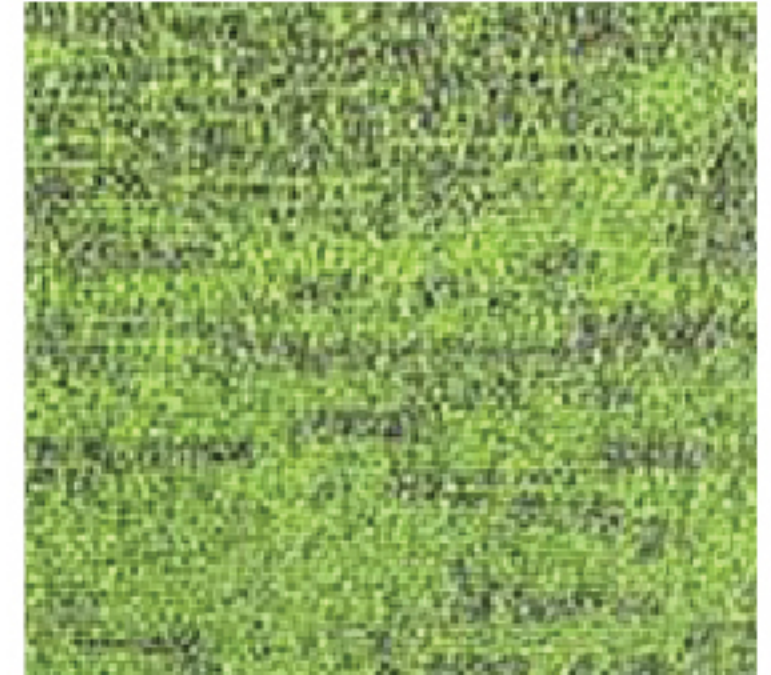

NEW STYLE 65-106



NEW STYLE



AK SPECIFICATION SHEET

Pile fiber material	100% Polypropylene
Construction	High-low Loop
Pile Height	2.8-3.2mm±0.5mm
Pile yarn weight	550 g/m ²
Tile Size	50 cm x 50cm
Backing type	Bitumen
Area per box	7sqm/carton
No. of Tiles per box	28pcs/carton
Dye method	Solution Dyed
Tufting Gauge	1/12"
Total Weight	2800g / sqm±5%
Total Thickness	5.5±0.3mm
Recommended installation	Brick, Quarter Turn, Ashlar, Monolithic
Location usage	Not-heavy Traffic
Electro static propretiles	AATTCC 134 Anti-static
Antistatic	Propensity<3kv
Flame Perperties	ASTM E648 Radiant Panel
Flame resistant	ASTM E662 Smoke Density

NEW STYLE



NEW STYLE



NEW STYLE KARO HALI

