


ZENNAW

50 x 50 CM




ZENNAW 65-900

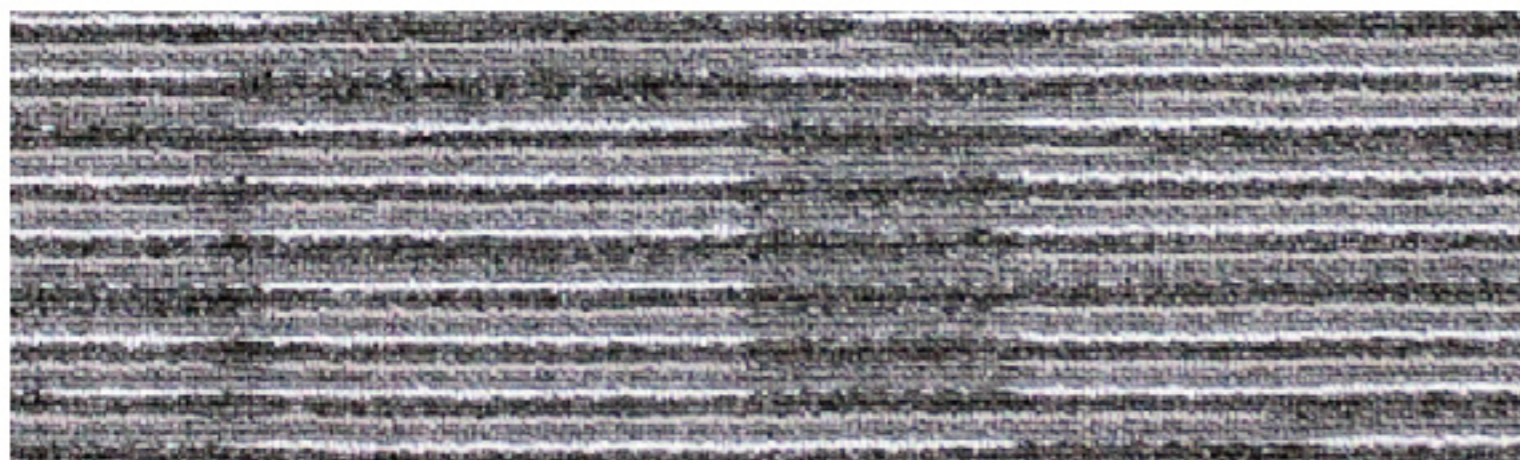

ZENNAW 65-980



ZENNAW 65-575

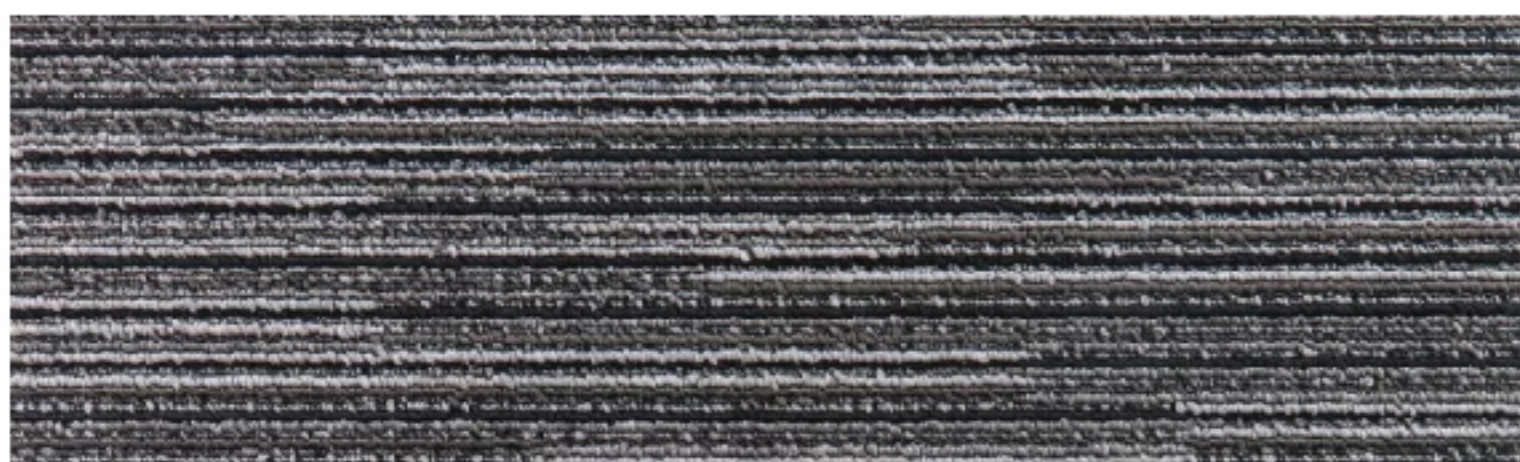

ZENNAW 65-577

ONE
CARPET

CLOSER

50 x 50 CM - 25 x 100 CM




CLOSER 65-01



CLOSER 65-02



CLOSER 65-03

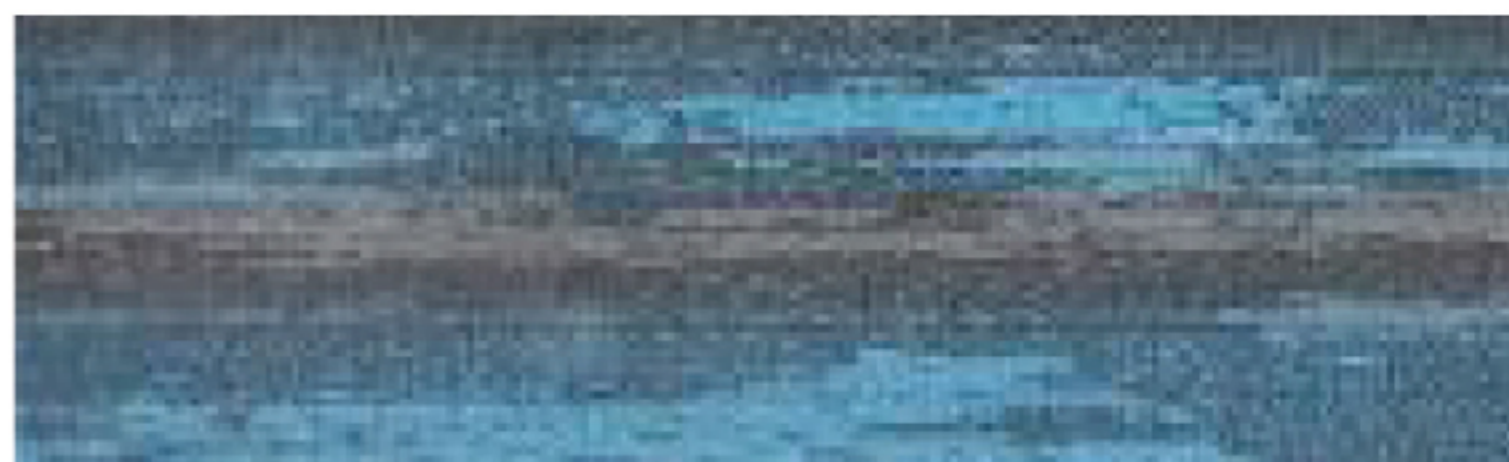

CLOSER 65-04

ZENNAW LCT COLLECTION



CONSTRUCTION STRUCTURE STRUKTUR STRUCTUUR	Tufting 1/10" loop pile Tufté 1/10" loop pile Getuftet 1/10" loop pile Getuft 1/10" loop pile	FASTNESS TO LIGHT SOLIDITÉ À LA LUMIÈRE LICHTECHTHEIT LICHTECHTHEID	EN ISO 105-B02 ≥ 5-8
PILE MATERIAL COMPOSITION DU VELOURS POLMATERIAAL POOLMATERIAAL	100% PP	COLOUR FASTNESS TO WATER SOLIDITÉ À L'EAU WASSERECHTHEIT WATERECHTHEID	EN ISO 105-E01 ≥ 4-5
SECONDARY BACKING DOSSIER RÜCKEN TAPIJTRUG	Bitumen back Min. 70% recycled content	FIRE RESISTANCE COMPORTEMENT AU FEU BRENNVERHALTEN BRANDGEDRAG	EN 13501-1 C _s -1 Certexbel 0493-CPR-0130
PILE WEIGHT POIDS DU VELOURS POLEINSATZGEWICHT POOLGEWICHT	± 550 gr/m ²	SIZE DIMENSION ABMESSUNG AFMETING	50 X 50 cm
TOTAL WEIGHT POIDS TOTAL GESAMTGEWICHT TOTAAL GEWICHT	± 4.300 gr/m ²	PACKAGING EMBALLAGE VERPACKUNG VERPAKKING	5 m ² /b 20 p/b
PILE THICKNESS ÉPAISSEUR DU VELOURS POLDICKE POOLDIKTE	± 4,0 mm	TUFT DENSITY NOMBRE DE POINTS NOPPENZAHL AANTAL PUNTEN	212.760/m ²
TOTAL THICKNESS ÉPAISSEUR TOTALE GESAMTDICKE TOTAAL DIKTE	± 7,0 mm	CLASSIFICATION CLASSEMENT KLASSIFIKATION CLASSIFICATIE	EN 1307 22-LC1
PRODIS / GUT	90CF84A0		




ITC CO BV
Kanegestraat 15, B-8700 Tielt
itc-carpets.com



CLOSER LCT COLLECTION

PRODUCT TYPE	PLANK	STITCHES	40 PER INCH
SIZE	100 x 25 CM	FINISHED PILE HEIGHT	0.157" AVG (4.0 MM)
PILE HEIGHT	480 GRAMS / sqm	FACE YARN	100% POLYPROPYLENE (OLEFIN)
CONSTRUCTION	MACHINE TUFTED	DYE METHOD	SOLUTION DYED
SURFACE TEXTURE	TEXTURED PATTERN LOOP	PRIMARY BACKING	100% NON WOVEN SYNTHETIC
GAUGE	1/12" (47.2 / 10 CM)	BACKING MATERIAL	BITUMEN BACKING

APPROVES INSTALLATION METHODS

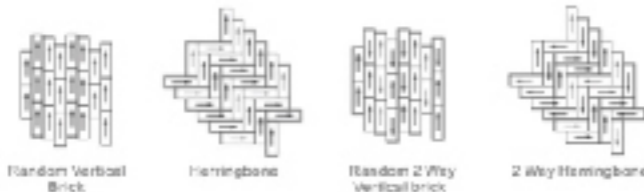

CLOSER

ONE CARPET

ZENNAW



ZENNAW
CLOSER
KARO HALI

